


> axr7+

- Excellent printing quality and sensitivity
- Excellent resistance to smudge and scratch
- Good resistance to high temperature
- Receptor multi-compatibility


AXR®7+ is the standard resin ribbon of the inkanto range. Its high versatility (it also prints on coated papers), its performances (sharpness, printing speed) and its ability to widen the usual application fields of resin ribbons have resulted in making AXR®7+ the worldwide reference on this family of products.

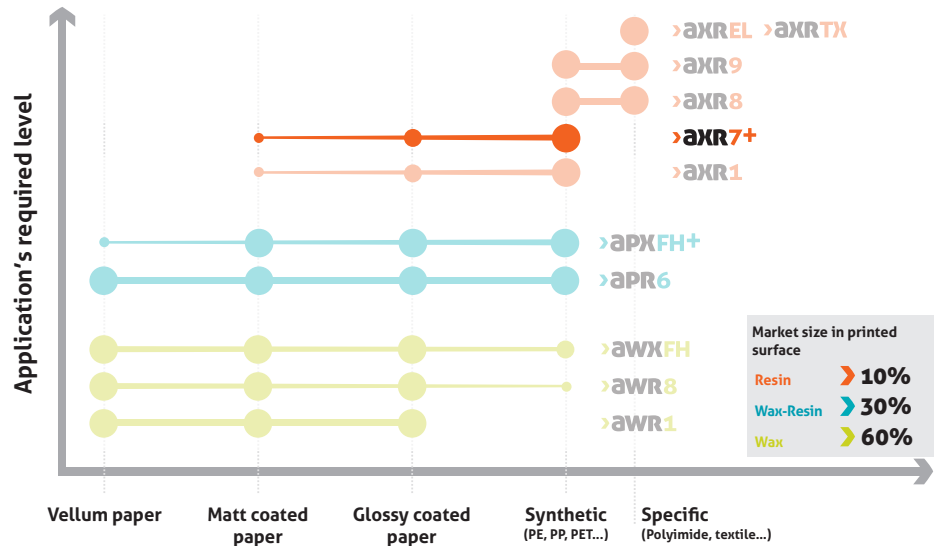


Printing receptor

papers	synthetics
Coated ○○○	PP ●●●
Glossy coated ●●○	PE ●●●
	PET ●●●

Printer settings

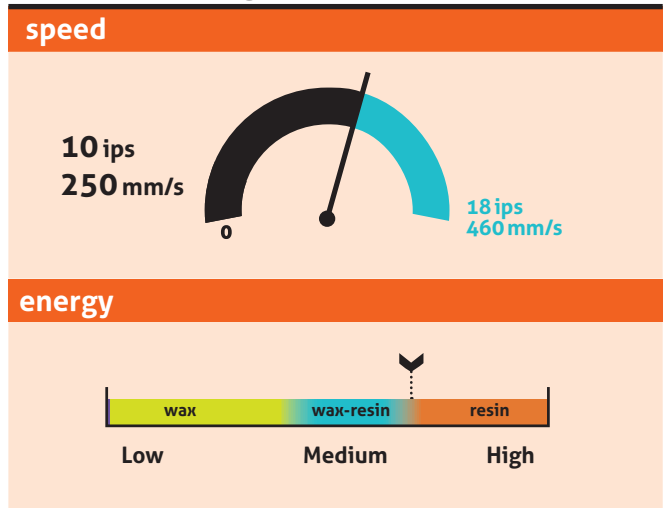

Print resistance

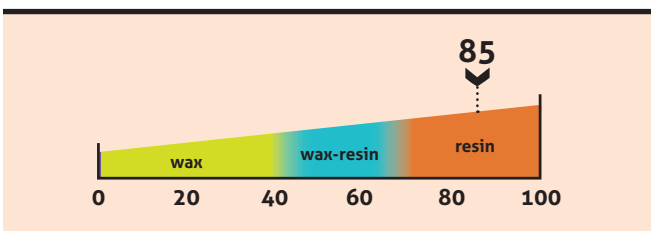

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen Restrictions

Your ribbon identity

Colours: ● ○ ● ● ●


Length (m):

Width (mm):

Part number:

Your distributor:

Contact :



> aXR7+

Application fields




Product performance

print quality					
90°Barcode	95	A _a Small characters	95	Logos	95
0°Barcode	100	2D Barcode	100	Blackness	1,7 ODR*
technical resistances					
Heat	180°C 356°F 300°C 572°F	Light/Blue Wool	>7	Solvents	60
Water/Submerge	100	Rubbing	95	Rubtester: 939g, no damage after ... cycles : IPA: 120 Ethanol: 25 Mineral Spirit: 60 Unleaded gasoline 98: nr* Motor oil: 250 Brake fluid: nr* *not recommended	

Product physico-chemical features

product structure	
PET film	Thickness: 4,5 µm
Ink	Resin
Melting point	80°C/176°F
Backcoating	Silicon based
Coefficient of Friction	Kd < 0.2
Ribbon thickness	< 9 µm
The ribbon is anti static build-up treated	

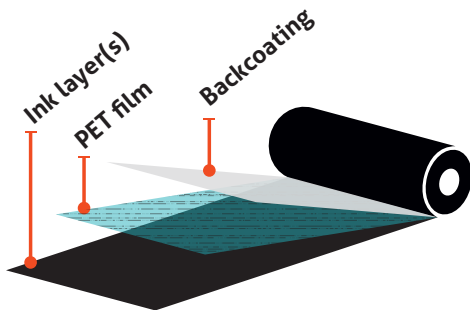

Storage

storage conditions

12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.